


# focus

## TECHNICAL DATASHEET

# E60

FOCUS LIMITOR/E-Series  
On/Off Multi-Turn Electric Actuator

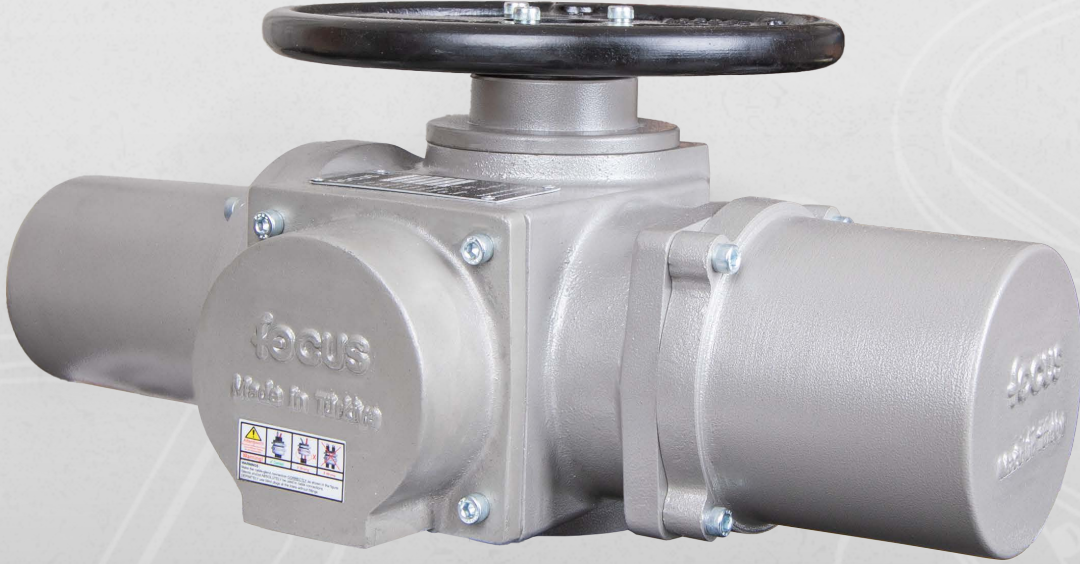

### Headquart

Mutlukent Mahallesi,  
2016/1 Sokak, No:32  
Çankaya, Ankara|Türkiye

+90 312 286 0906  
sales@denz.co

### Factory

Ivedik OSB 1354.  
Cadde 1357,Sokak No:38  
Ankara|Türkiye



## E60

**380-400V, 3pH, 50Hz  
Multi-Turn, On/Off**









### General features:

- Type: E60
- Operation: Only remote
- Position Control: Limit & torque switches 2 limit and 2 torque switches
- S4-25 minutes duty
- 3 Phase, 380-400VAC, 50Hz
- Torque: 60 N/m
- Output Speed: 38 Rpm
- Motor Power: 0,37 kW
- Insulation: Class H
- Enclosure: IP68
- Motor Protection: Thermo switches (PTC)
- Flange-Gearbox Connection: ISO 5210 F10
- Coupling: B4 hand-wheel for emergency situations
- Main pin connector (easy electric connection)
- Motor pin connector (easy maintenance)
- Control unit pin connection (modular design, easily attach a matic unit later on)
- Full cast aluminum body
- Auto-lock system
- Maximum stem diameter (for valves): 25mm
- Max mum stem diameter (for penstocks): 40mm
- Easy switch settings

### Alternative or additional features (might cause price difference)

- 4-20 mA transmitter
- 4-20 mA positioner
- Mechanical position indicator
- Non-Instruct ve switch
- Output speed: 76 Rpm
- Coupling: A-Type coupling (unrchnied)
- 220V

*Additional notes ( if any):*



# WIRING DIAGRAM

## E60

220/380-400V,1-3pH,  
50Hz  
Multi -Turn

